

Introduction

Variability

Sludge Origin


- Source: Industrial, domestic
- Composition: inorganic, organic

Sludge treatment

- Thickening
- Type and dosage of coagulant and flocculant
- Dehydration technology: filtration, centrifugation
- Storage time

Dehydrated sewage sludge viscoelastic behaviour

Laboratory scale the dehydration

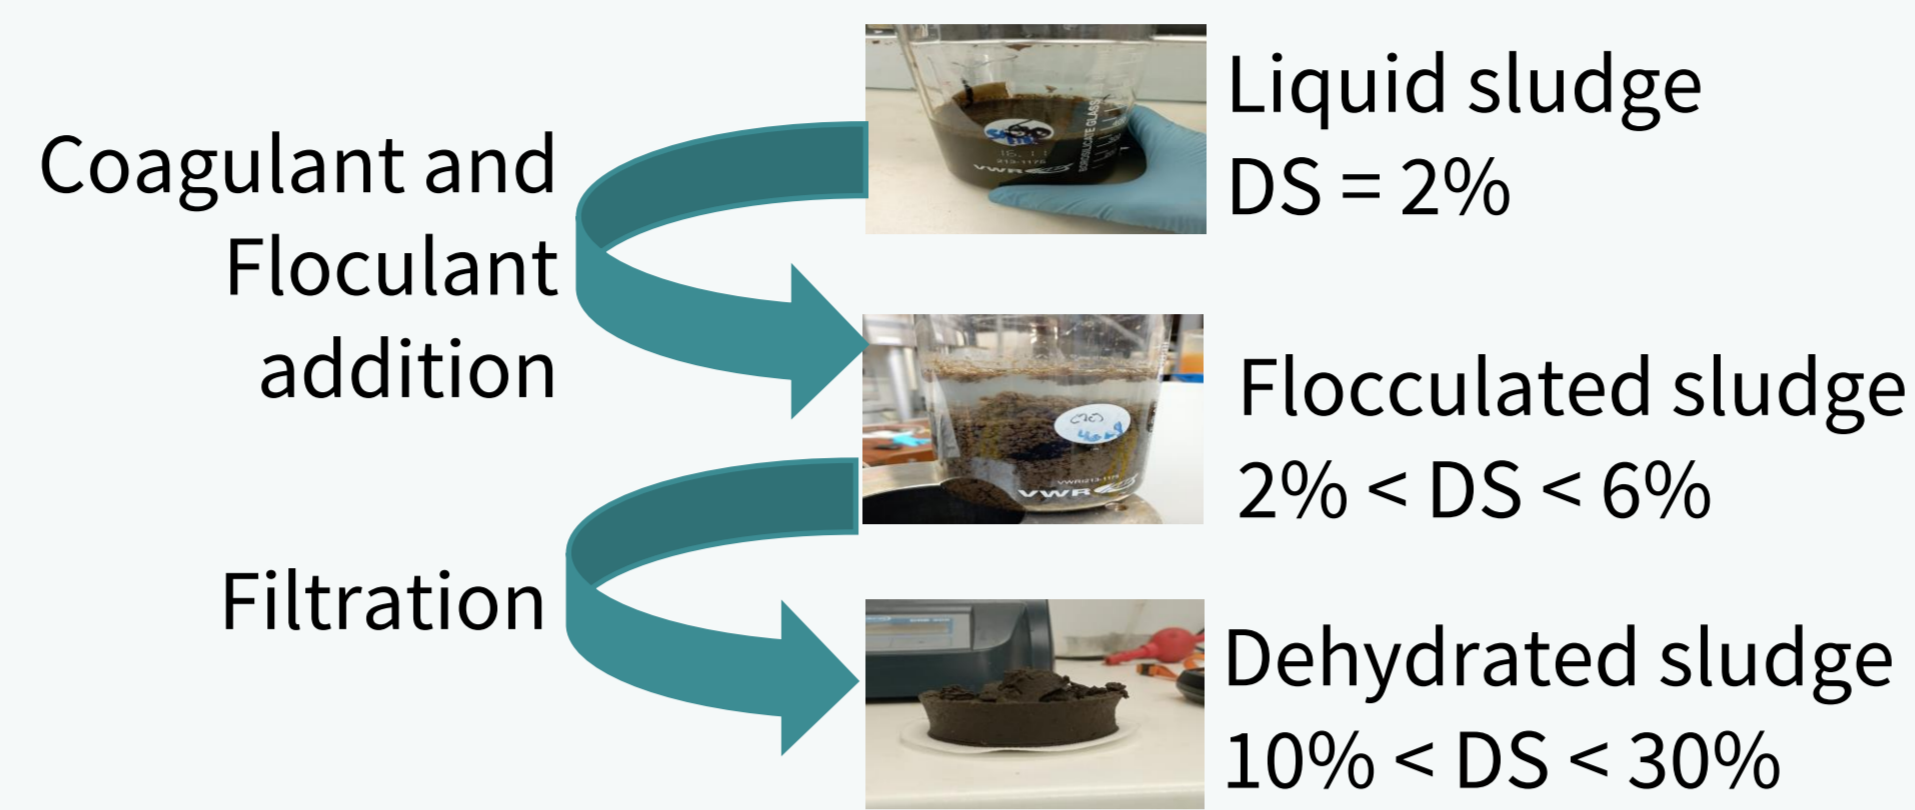

Keywords: Dehydrated Sewage Sludge; texture, rheology, viscoelasticity.

Problems


- Literature focused on liquid sludge
- Non standardized measurements
- Lack of data
- Pasty phase
- Loss of structure

Importance

- Predictable Behaviour: Consistency and Stability
- Improve pumping, mixing
- Enhance dewatering and drying
- Product Quality and Safety
- Reduce Operational Costs

Materials and Methods

Experimentation sequence

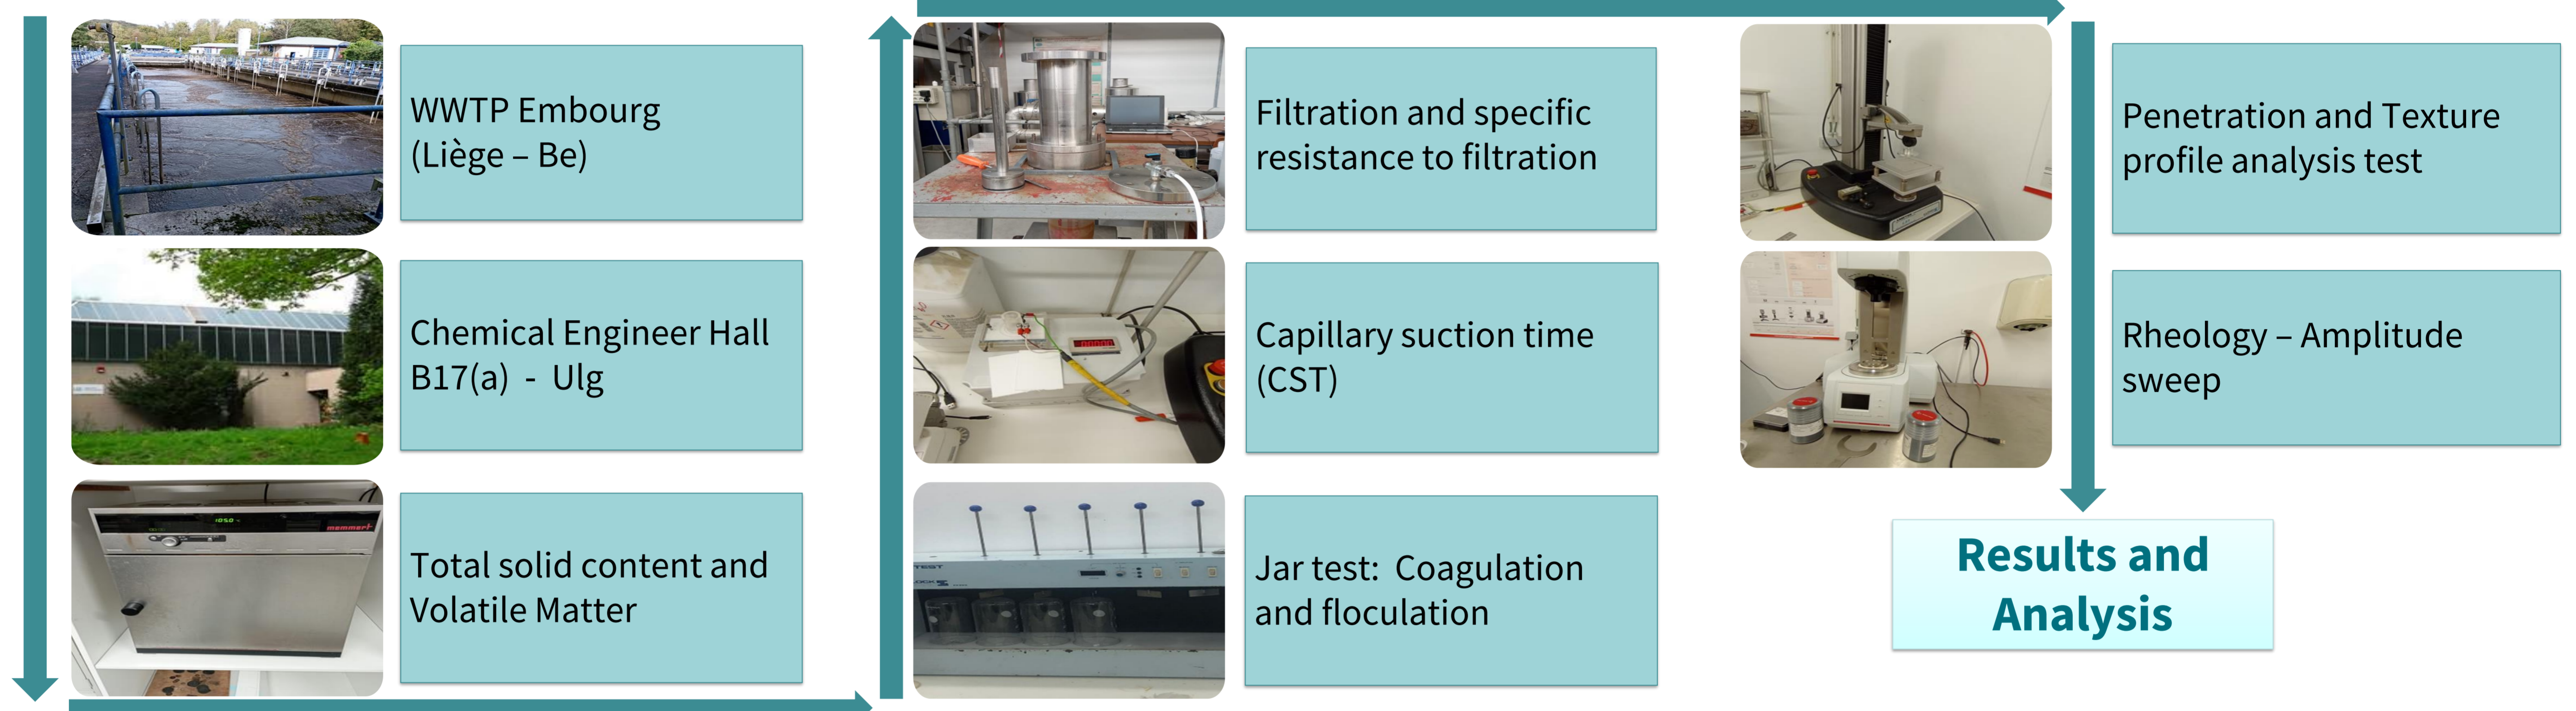

Three different types of flocculants were used in this study

Results

- The optimal dosage (OD) of flocculant was based on the minimal CST value, which corresponded to the minimal SFR value.

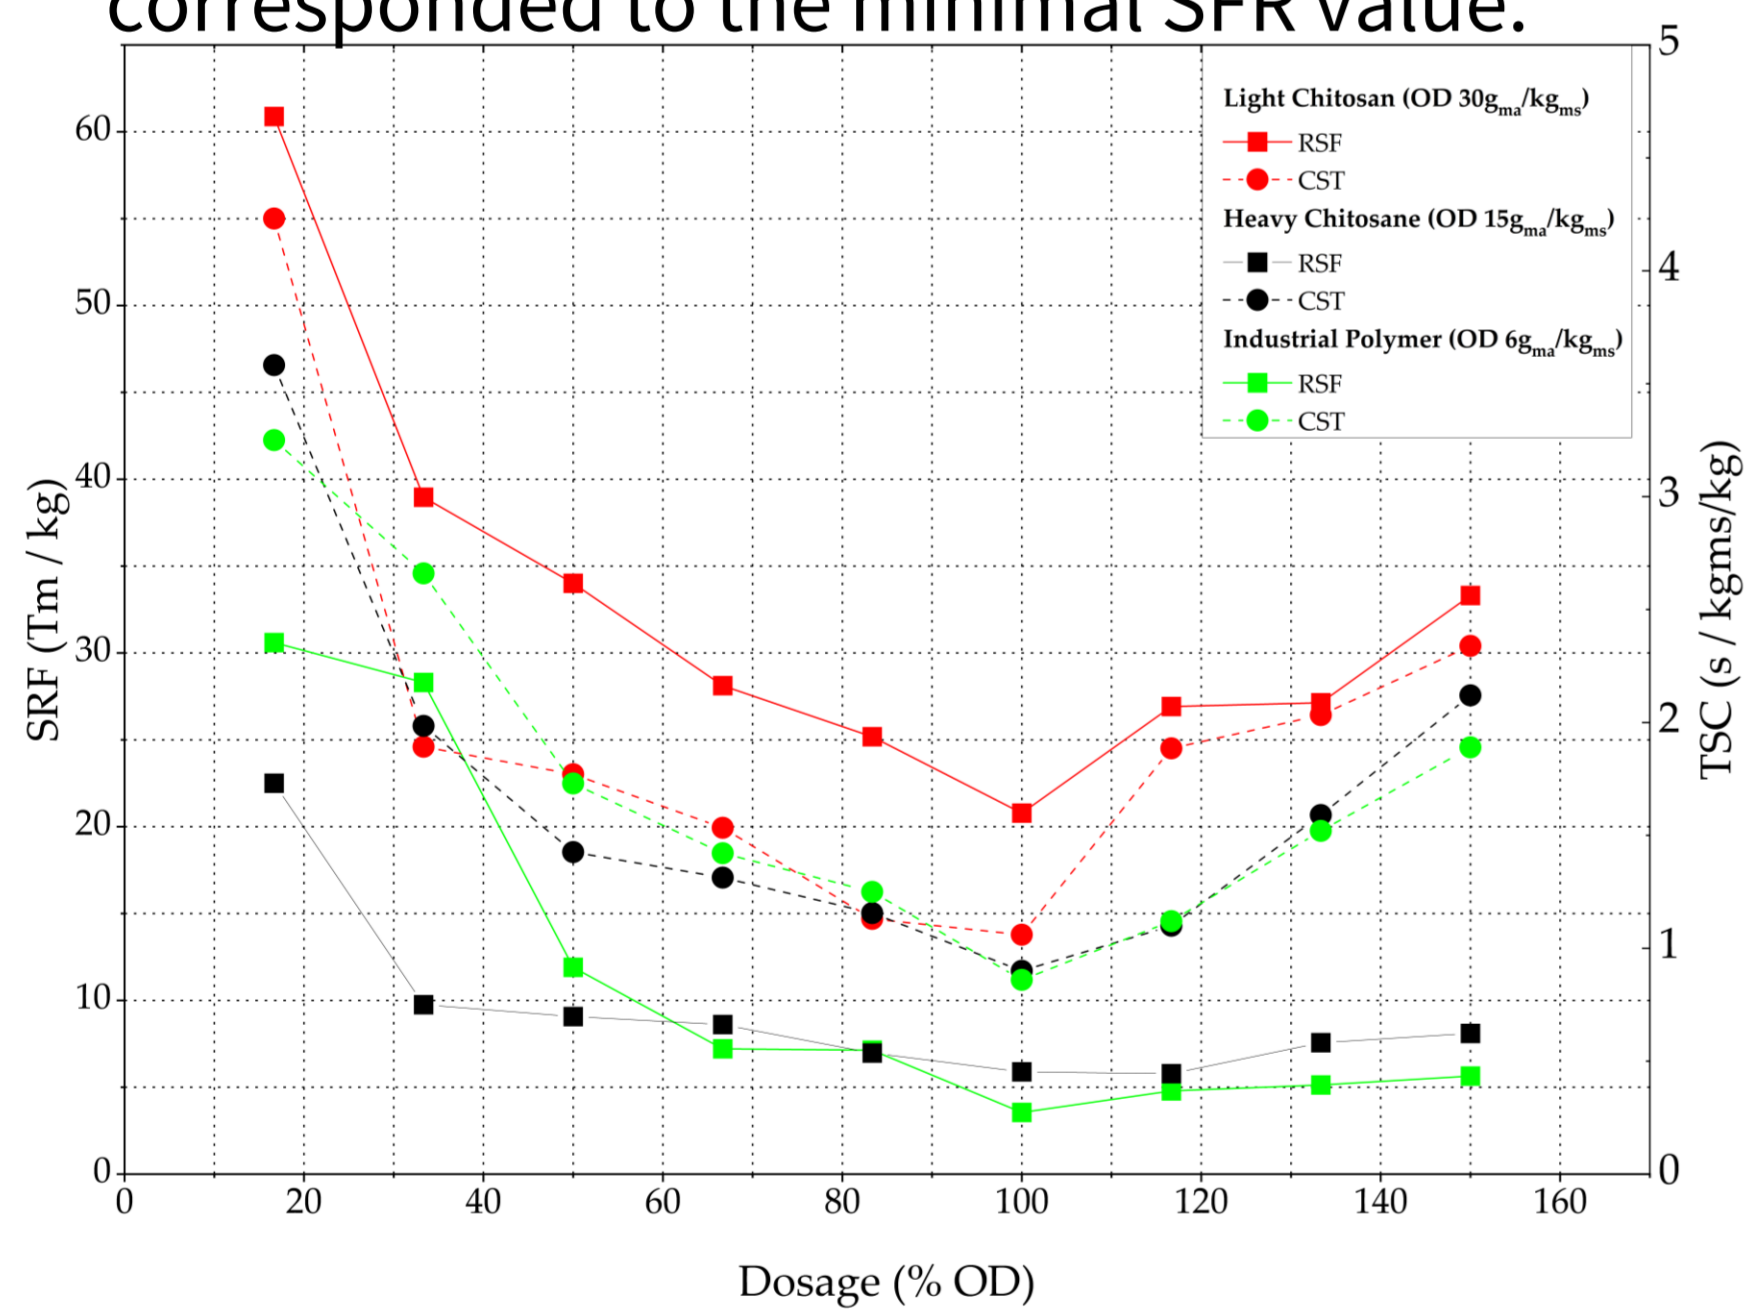


Fig. 1: Variation of TSC and SRF in relation with % of optimal flocculant dosage.

- Hardness and G' are proportional to the flocculant dosages until reaching an optimal limit where there is no further influence.

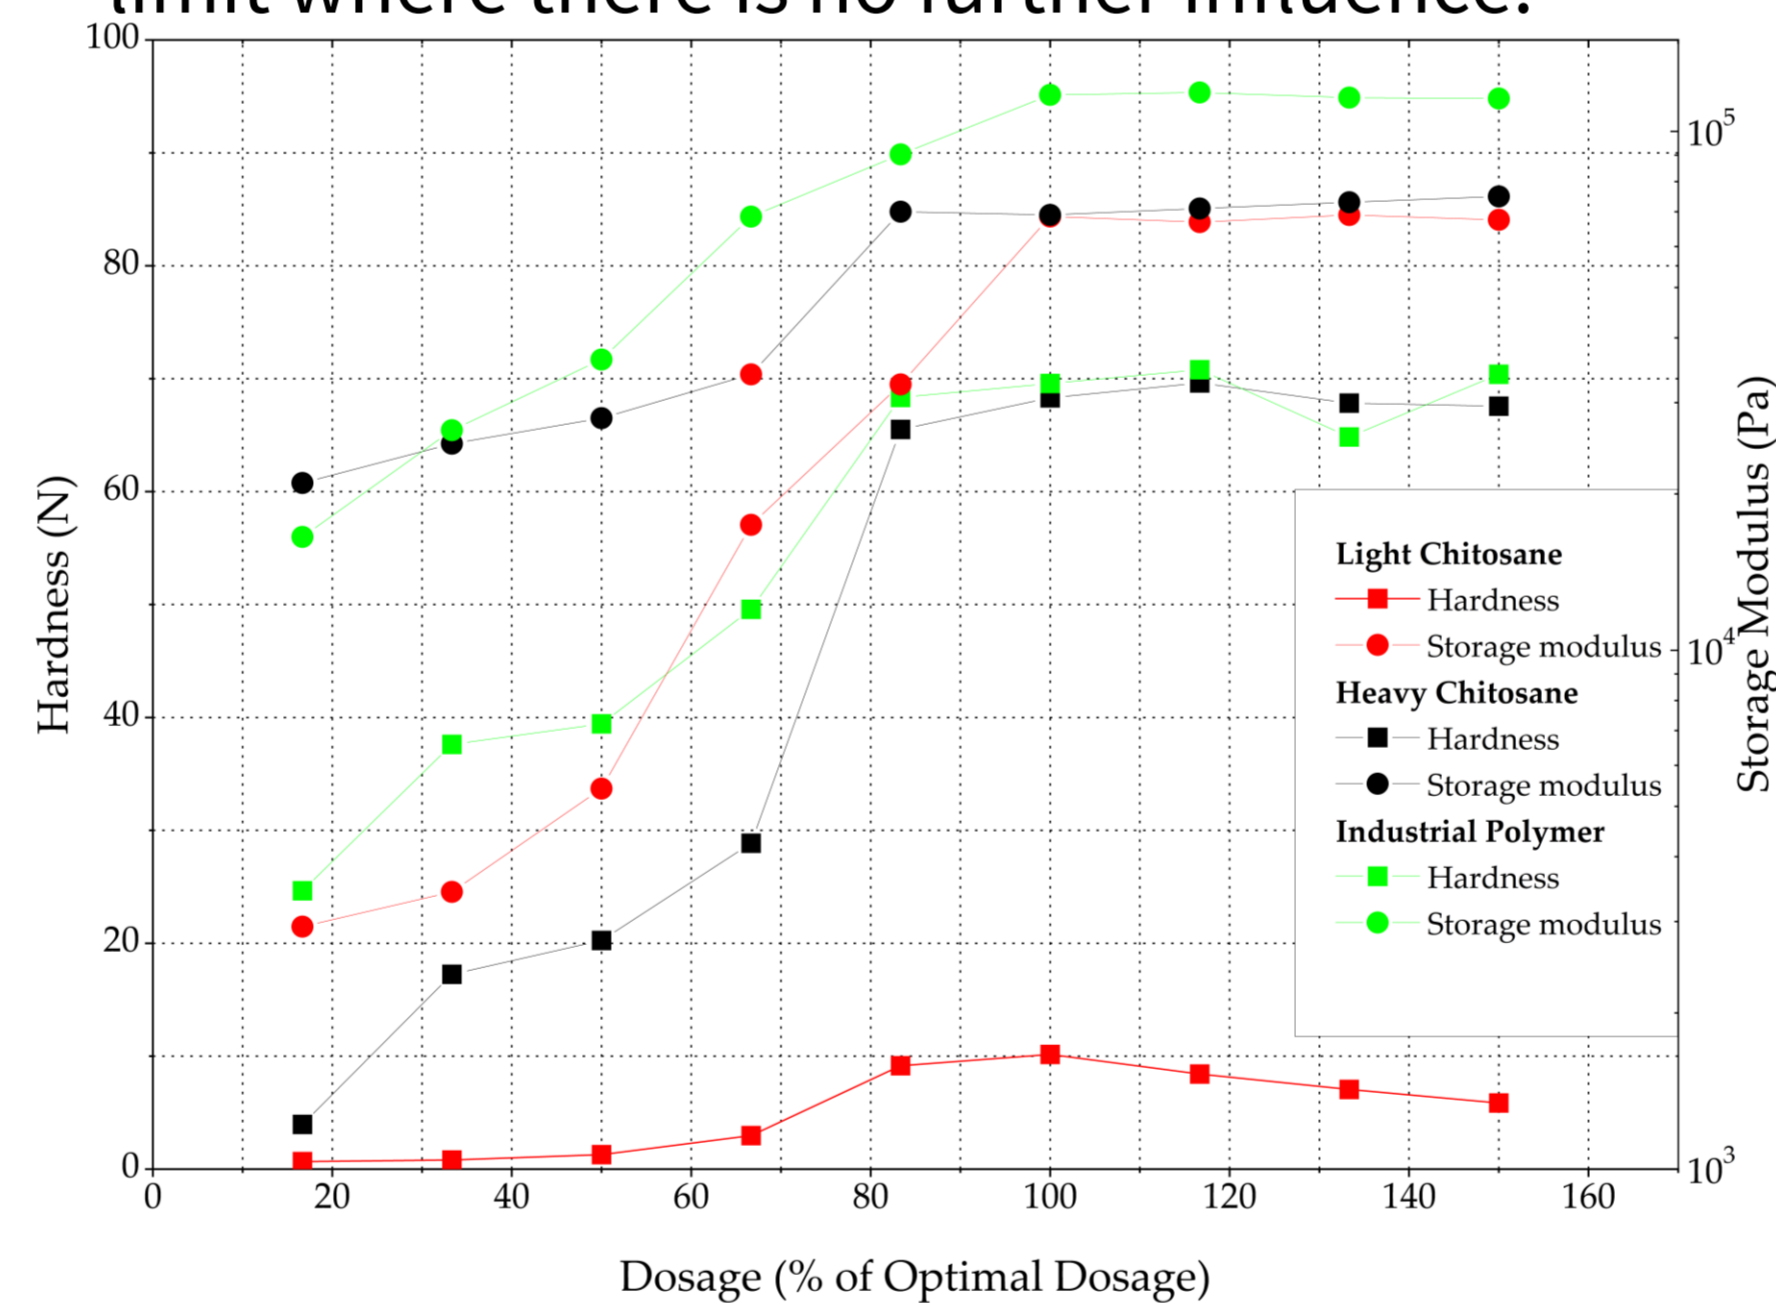


Fig. 2: Variation of hardness and storage modulus in relation to the % of optimal flocculant dosage.

- In the range of pressure studied, this variable did not show appreciable effects on hardness and the storage modulus G'

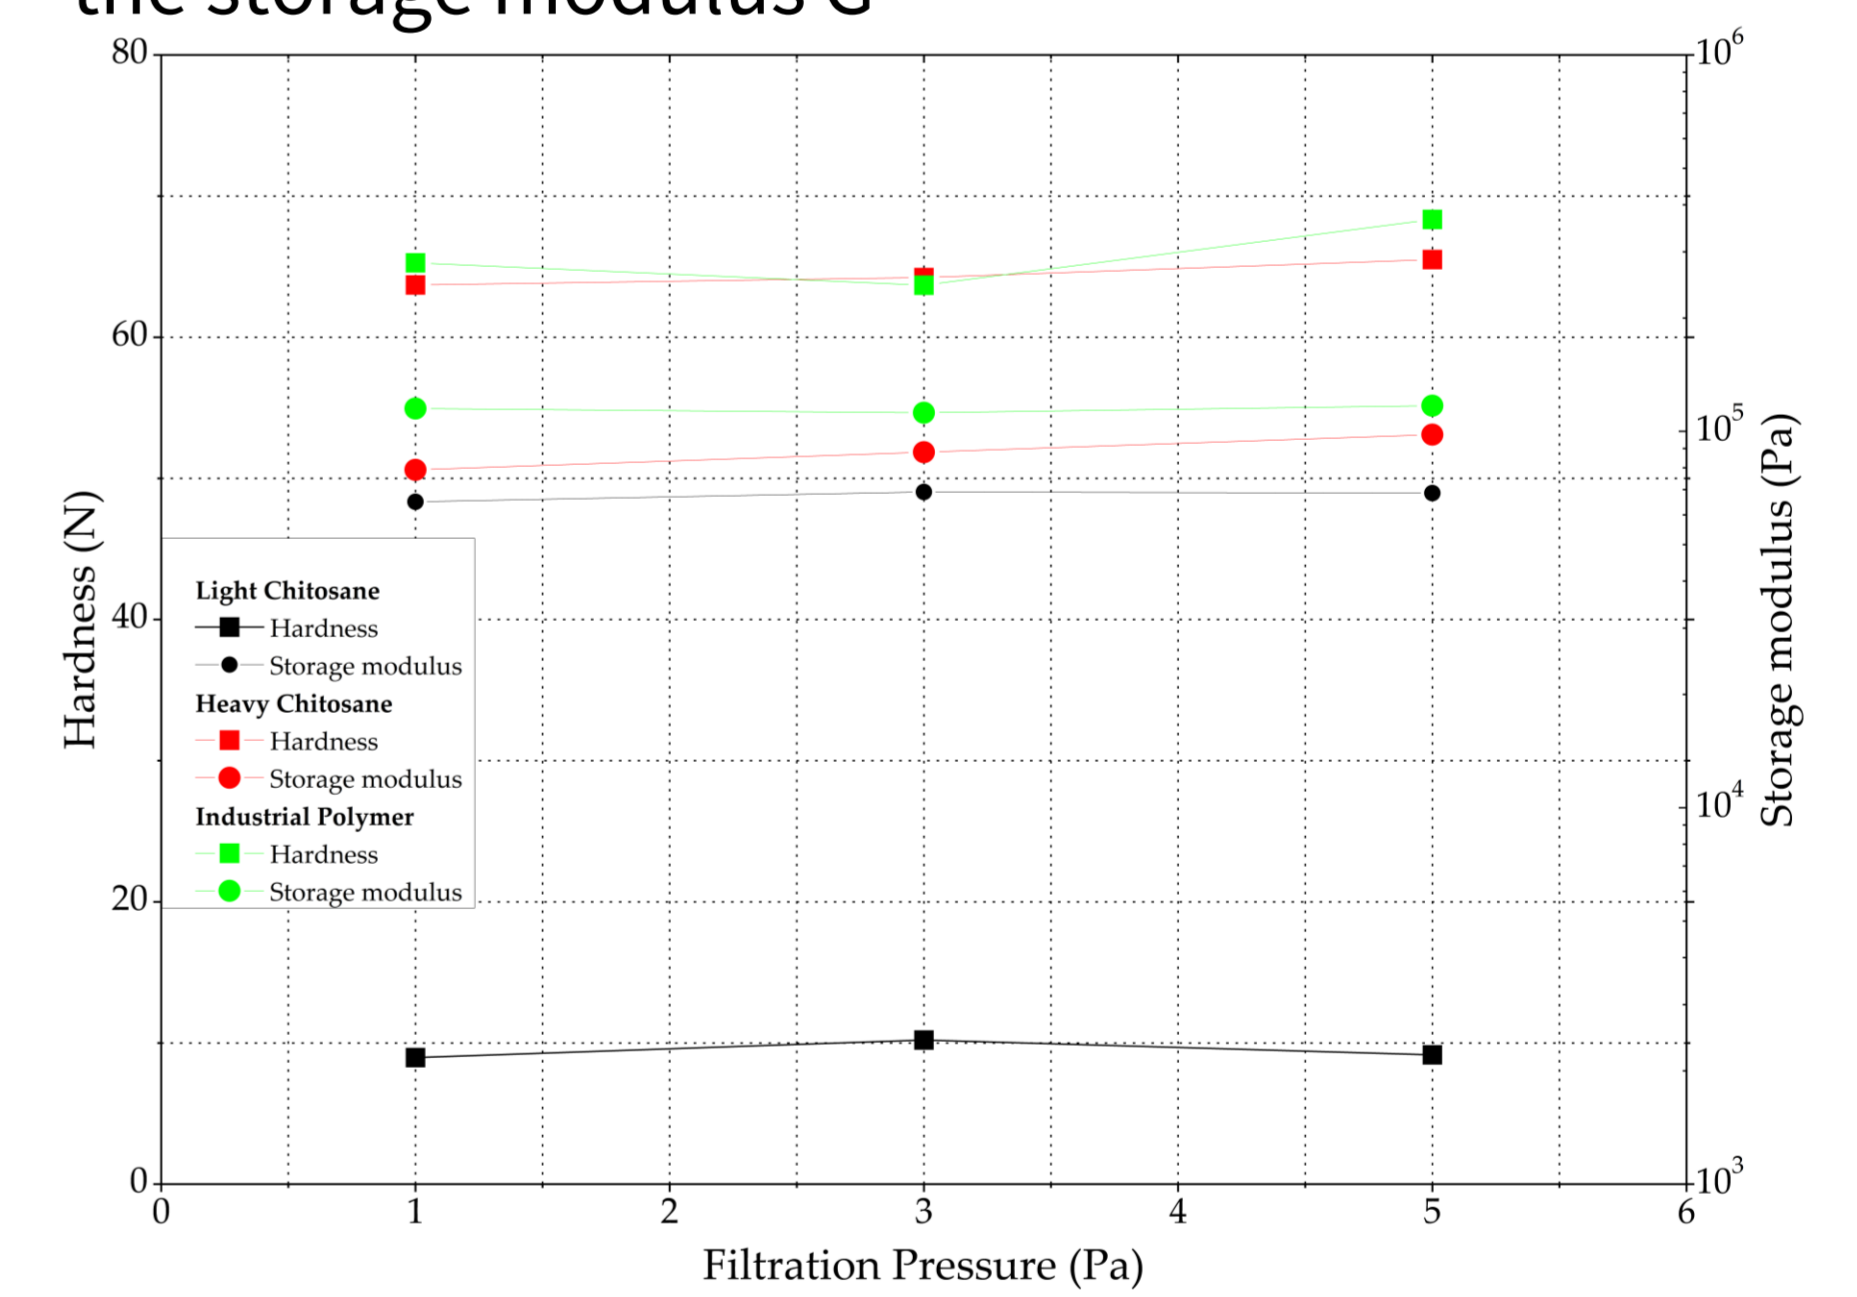


Fig. 3: Variation of hardness and storage modulus in relation to the filtration pressure

Conclusions

By systematically investigating and characterizing the viscoelastic properties of DSS, this study provides valuable data that can inform both academic research and practical applications in wastewater treatment. The study on the viscoelastic behavior of dehydrated sewage sludge (DSS) revealed several key findings:

- **Standard Methodology:** The methods used in this study represent a significant step towards the standardization of the characterization of dehydrated sewage sludge (DSS). This standardization is demonstrated by the reproducibility of the results and the similarities observed, even when different types of flocculants are used.
- **Optimal Dosage:** The optimal dosage (OD) of flocculant was determined based on the minimal Capillary Suction Time (CST) value, which also corresponded to the minimal Specific Resistance to Filtration (SFR) value.
- **Proportional Relationship:** Hardness and storage modulus (G') increased proportionally with the flocculant dosages until reaching an optimal limit, beyond which no further influence was observed.
- **Pressure Effects:** Within the studied pressure range, filtration pressure did not show appreciable effects on hardness and the storage modulus (G').

References

- [1] M. Mouzaoui, J. C. Baudez, M. Sauceau, and P. Arlabosse, "Experimental rheological procedure adapted to pasty dewatered sludge up to 45 % dry matter," *Water Res.*, vol. 133, pp. 1–7, 2018
- [2] F. Liang, M. Sauceau, G. Dusserre, and P. Arlabosse, "A uniaxial cyclic compression method for characterizing the rheological and textural behaviors of mechanically dewatered sewage sludge," *Water Res.*, vol. 113, pp. 171–180, 2017
- [3] Y. B. Pambou, L. Fraikin, T. Salmon, M. Crine, and A. Léonard, "Enhanced sludge dewatering and drying comparison of two linear polyelectrolytes co-conditioning with polyaluminum chloride," *Desalin. Water Treat.*, vol. 57, no. 58, pp. 27989–28006, 2016

Acknowledgments

The authors thank the FNRS (Belgian Fund for Scientific Research) for funding the PDR T015920F 'Sludge dewatering and drying vs rheology'

